

Installation and Safety Instructions

Pendant Light Fitting

Safety Warnings

These instructions are for your safety. Please read through them thoroughly before use and retain them for future reference. If you are in any doubt about installing this product, consult a qualified electrician.

This product is only suitable for connection to a 220-240V~ 50Hz supply in accordance with current IEE wiring regulations, and should be installed in accordance with local building regulations. It is for domestic ceiling use only, and is not suitable for a bathroom location.

This is a Class I product and must be Earthed. The terminal blocks are supplied according to requirements of the fitting.

IMPORTANT: Always switch off the mains supply during installation or maintenance. We recommend that the fuse is withdrawn or the circuit breaker switched off at the distribution board whilst work is in progress (turning off the light switch is not sufficient). Connection should be via a wall switch to enable safe isolation.

The product must be securely fixed to the mounting surface using the screws and wall plugs supplied. The screws and wall plugs supplied are suitable for "masonry" only. Other fixings are not supplied and must be purchased.

Decide on the position of the light fitting or remove existing light fitting. Note the position of the electrical connections, and ensure there is a solid mounting surface, Preferably a wooden joist or joist bridge, to support the weight of the light fitting.

Take care not to drill into any pipes or mains cables beneath the surface during mounting holes preparation.

Never put anything on the product or hang anything on any part of this product.

IMPORTANT: Ensure that all electrical connections are tight and that no loose strands are left out of the terminal.

Never fit bulbs of a higher wattage than those specified on the label (as these may cause over heating and damage the fitting).

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.

Care and maintenance

For bulb replacement, switch off the product (preferably, isolate it at the distribution board) and allow it to cool down (Caution: bulb gets hot during use).

Clean with a dry cloth only. Do not use liquid or abrasive cleaners on this product.

Troubleshooting




When the bulb does not light after installation:

- > Ensure there is no electricity failure.
- > Ensure all the connections are secure.

If you have any doubt about installation/use of this product, consult a qualified electrician.

Assembly Instructions

1. **(See Fig.1)** If you are installing as a semi flush please disassemble the pendant canopy (F). Disconnecting the wires from the terminal block and carefully withdraw the wire through the canopy and loop (I). Remove the nut (a), washer (b), earth strap & terminal block (C) locking washer (d) and small loop (I) from the ceiling rose, noting their order and position. Remove the fixture loop (J) ensuring that the cable is not damaged.
2. **(See Fig.1)** Thread the cable through the show threaded rod (g) and then screw the long threaded rod (g) into the coupling (h) and the nut (e) onto the long threaded rod (g).
3. Slide the canopy (F), the lock washer (d), the terminal block (C) and the lock washer (b) onto the threaded rod (g) then secure with the nut (a). The cable will now need to be carefully cut and stripped to the correct length. Remember that The cable is difficult to replace so ensure the new length is long enough to wire the fitting safely.
4. Screw the threaded rod (K) into the coupling (L).
5. Thread the nut (N) onto the threaded stud (O) on the bottom of the chandelier and thread the threaded stud (O) into the coupling (M).
6. Slide the cap (P), along with rubber washers (Y) and the Crystal ball (Q) onto the threaded rod (O) then secure with the finial (R).
7. Thread the finials (S) into the arms (T).

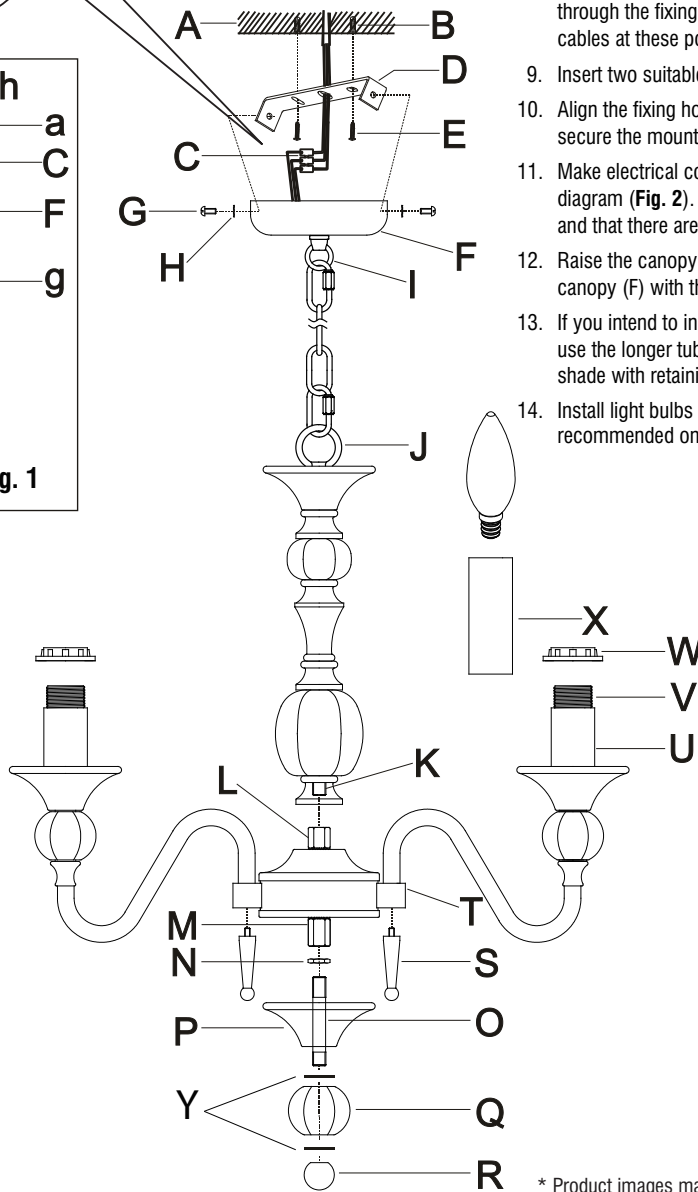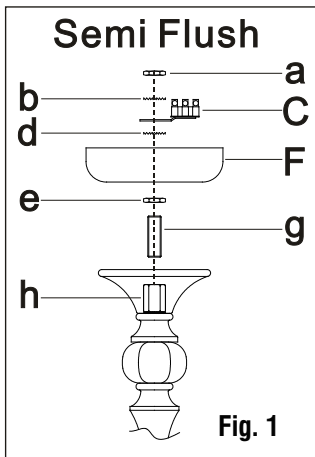

8. Position the mounting bracket (D) centrally under the ceiling (A) and mark through the fixing holes onto the ceiling (A). Check that there are no hidden cables at these positions and drill pilot holes for screws (E) into the ceiling (A).
9. Insert two suitable wall anchors (B) into the pilot holes in the ceiling (A).
10. Align the fixing holes in the mounting bracket (D) with the pilot holes, and secure the mounting bracket (D) with two screws (E).
11. Make electrical connections in the terminal block (C) per expanded wiring diagram (Fig. 2). Check that the terminal screws are tightened securely and that there are no stray wires, or bare cable present.
12. Raise the canopy (F) to the mounting bracket (D), and then secure the canopy (F) with the lock washers (H) and screws (G).
13. If you intend to install shades (not provided) then use short tubes (U), otherwise use the longer tube (X). Place shade (not provided) over socket (V), then secure shade with retaining ring (W).
14. Install light bulbs (not supplied). Do not exceed the maximum wattage recommended on the lampholder.

* Product images may vary.



- (EN) Scan QR code for multi-language
- (FR) Scannez le code QR pour plusieurs langues
- (ES) Escanee el código QR para varios idiomas
- (PL) Zeskanuj kod QR dla wielu języków
- (DE) Scannen Sie den QR-Code nach mehreren Sprachen
- (IT) Scansiona il codice QR per multilingua



UK Manufacturer: BH17 7BY
 EU Manufacturer: Brilliant AG,
 Brilliantstrasse 1, D-27442 Gnarrenburg